

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number  
**WO 2005/007526 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 47/08**

(21) International Application Number:  
PCT/CH2003/000491

(22) International Filing Date: 18 July 2003 (18.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): CRE-  
ANOVA AG [CH/CH]; Seestrasse 83, CH-8702 Zollikon  
(CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LAGLER, Louis  
[CH/CH]; Nürenbergstrasse 25, CH-8037 Zürich (CH).

(74) Agent: IP & T RENTSCH UND PARTNER; Fraumün-  
sterstrasse 9, Postfach 2441, CH-8022 Zürich (CH).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: HINGED CLOSURE MOULDED IN CLOSED POSITION

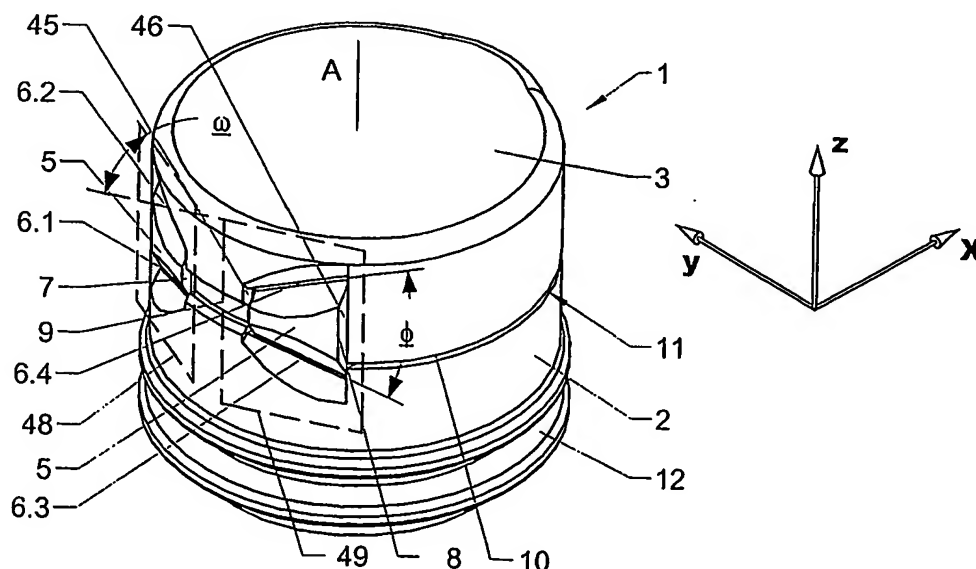

(57) Abstract: The invention is directed to a closure (1) moulded in closed position. The closure (1) comprises a body (2) and a lid (3), which are separated by a circumferential gap (10). A snap hinge (4) comprising two trapezoid elements (5), which are connected each by film hinges (6) to the body (2) and the lid (3), causes a snap action while opening or closing the closure (1). The closure offers opening angles in the range of 220°.

WO 2005/007526 A1